

# BW0125-1

## 1/8" BLACK POLYETHYLENE SINGLE COATED FOAM TAPE

### PRODUCT DESCRIPTION


#### Single Coated Tape with Liner

BW0125-1 is a 1/8" thick black closed cell, crosslinked polyethylene foam coated on one side with a general purpose rubber based adhesive with a white kraft liner.

### FEATURES & BENEFITS

- Easily die cut
- High immediate bond
- Great chemical resistance
- Low compression set
- Best conformability, cushioning, & vibration damping

### PRODUCT CONSTRUCTION

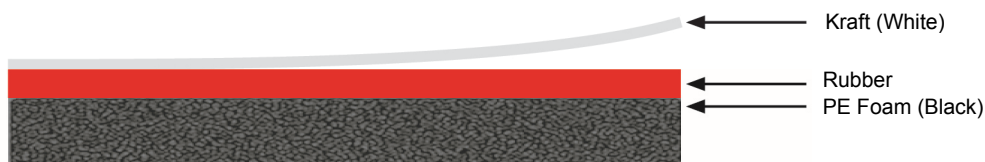

### PRODUCT SPECIFICATIONS

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness (Total)	126.80 mils	3.221 mm	PSTC-133
Adhesive Thickness	1.80 mils	0.046 mm	PSTC-133
Carrier Thickness	125.00 mils	3.175 mm	PSTC-133
Peel Adhesion	75 oz/in	20.84 N/25mm	PSTC-101
Tack	33 oz	936 g	ASTM D 2979
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @15.2 kPa	PSTC-107
Tensile Strength	160 lb/in	18 N/25mm	PSTC-131
Elongation	210 %	210 %	
Minimum Service Temperature	50 °F	10 °C	
Maximum Service Temperature	155 °F	68 °C	

Tested values are typical under standard conditions and are not intended to be used for specification development. Technical data is believed to be true and accurate; Adhesive Applications recommends that the purchaser test for performance and fitness of use in all applications.

### Adhesive Applications - The Adhesive Solutions Company

41 O'Neill Street  
Easthampton, MA 01027

413-527-7120 Main  
800-356-3572 Toll Free U.S.

[www.adhesiveapps.com](http://www.adhesiveapps.com)

**Adhesive**  
Applications™

Rev A

7/24/2018

