

8208B

1/8" WHITE POLYETHYLENE DIFFERENTIAL DOUBLE COATED FOAM TAPE

PRODUCT DESCRIPTION


Double Coated Tape

8208B is a 1/8" thick white closed cell, crosslinked polyethylene foam coated with rubber based adhesive on one side and acrylic based adhesive on the other with an easy release 4 mil blue poly liner.

FEATURES & BENEFITS

- Easily die cut
- Low application temperature
- Great chemical resistance
- Low compression set
- Best conformability, cushioning & vibration damping

PRODUCT CONSTRUCTION

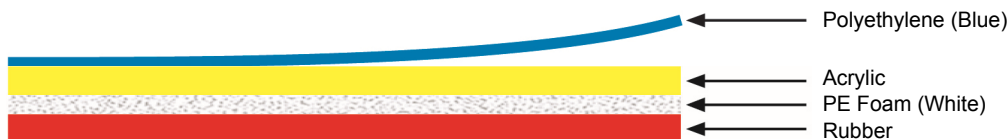

PRODUCT SPECIFICATIONS

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness (Total)	129.00 mils	3.277 mm	PSTC-133
Adhesive Thickness (Liner Side)	2.00 mils	0.051 mm	PSTC-133
Carrier Thickness	125.00 mils	3.175 mm	PSTC-133
Adhesive Thickness (Exposed Side)	2.00 mils	0.051 mm	PSTC-133
Peel Adhesion	65 oz/in	18.06 N/25mm	PSTC-101
Tack	25 oz	709 g	ASTM D 2979
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	228 lb/in	998 N/25mm	PSTC-131
Elongation	269 %	269 %	
Minimum Service Temperature	50 °F	10 °C	
Maximum Service Temperature	155 °F	68 °C	

Tested values are typical under standard conditions and are not intended to be used for specification development. Technical data is believed to be true and accurate; Adhesive Applications recommends that the purchaser test for performance and fitness of use in all applications.

Adhesive Applications - The Adhesive Solutions Company

41 O'Neill Street
Easthampton, MA 01027

413-527-7120 Main
800-356-3572 Toll Free U.S.

www.adhesiveapps.com

Adhesive
Applications™

Rev A

7/24/2018

